


SN900 –1800 Spark Guards

Clip In Spark Guard Nouveau



Firebox	SN 900	SN 1100	SN 1250	SN 1500	SN 1800
Clip In Spark Guard Width	620	620	680	680	680
Clip In Spark Guard Height	845	1045	1195	1445	1745

Clip In Spark Guard Nouveau PIZZERIA

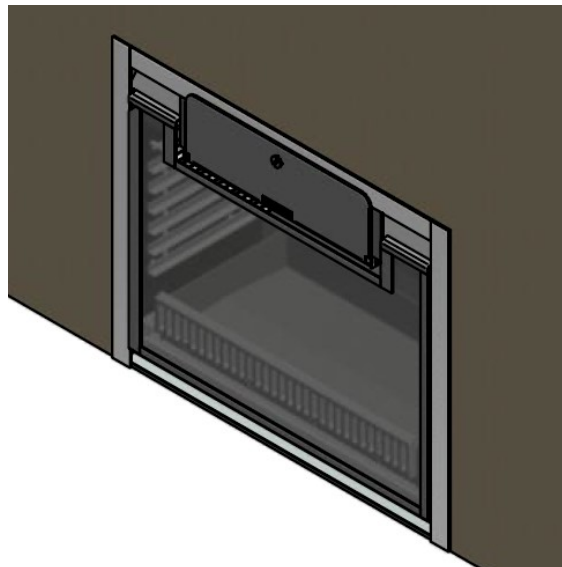


Firebox	SN 900	SN 1100	SN 1250	SN 1500	SN 1800
Clip In Spark Guard Width	620	620	680	680	680
Clip In Spark Guard Height	845	1045	1195	1445	1745


Due to continued product improvement, Warmington Ind LTD reserves the right to change product specifications without prior notification.

All dimensions are in mm


Clip In Spark Guard Fitment

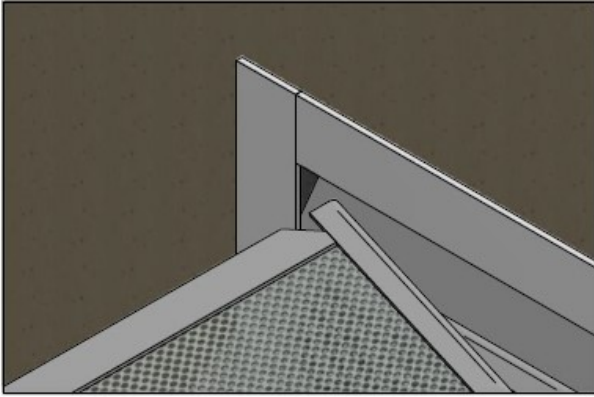


1. Holding the spark guard horizontally to the face of the fire, insert the top left hand side notch into the upper venting area as shown.

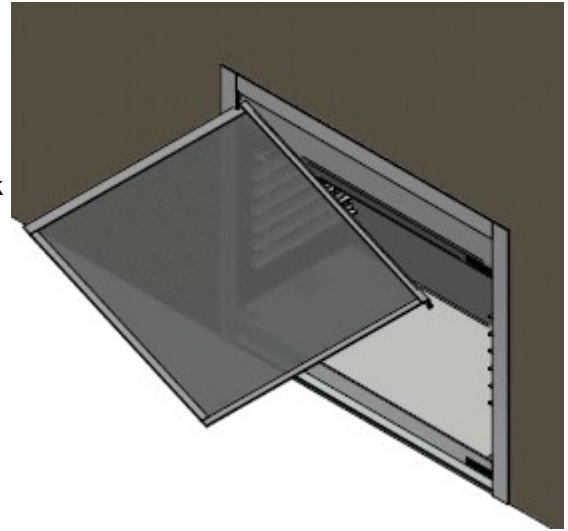

2. Swing right and side of spark guard into position.

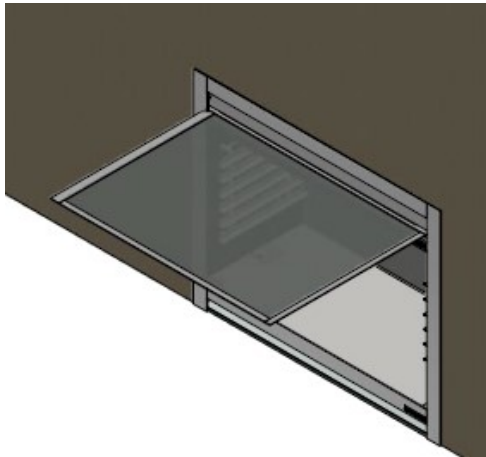

3. Once right hand side is in position, slide Spark guard across to the right until evenly sitting between flanges.

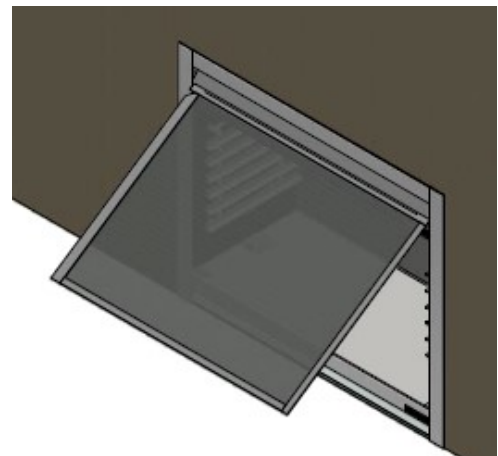

4. Lower Spark Guard into position.